



DATASHEET

VENTIS CO-LOCATION

Ventis Co-Location is the ideal platform for multi-tenant architecture, providing an excellent space-saving solution. Two, three, or even four conventional rack spaces can be housed within a single floor-standing cabinet footprint.

Primary Features

-  Combination locks fitted to each compartment
-  Static load capacity 1500kg (750kg dynamic)
-  Enclosed cable channels for secure cable access
-  Fully customisable - speak to our Sales team about your requirements



Rack Units	42	47
Rack height (mm without castors)	1972	2194



TECHNICAL SPECIFICATION

VENTIS CO-LOCATION

- ◆ Fully adjustable 19-inch mounting angles
- ◆ Secure cable management channels for each bay
- ◆ Levelling feet fitted as standard
- ◆ IP20 rated
- ◆ Lockable lift-off side panels


Options

Height	42U, 47U
Width	600mm, 800mm
Depth	1000mm, 1200mm
Front Door	Vented
Rear Door	Vented
Compartments	Two Bays, Three Bays, Four Bays
Finish	Black (RAL9005), White (RAL9010) Alternatives available on request
Base	Jacking feet fitted as standard. Heavy-duty castors and plinths are also available



VENTIS CO-LOCATION

DRAWINGS

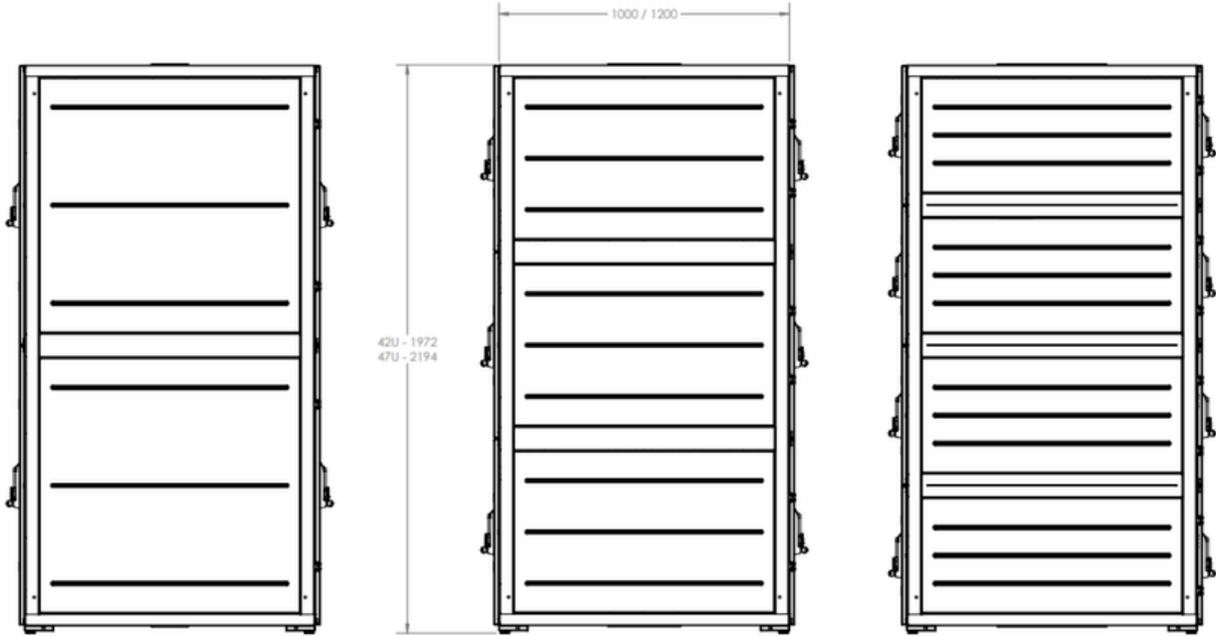

2-BAY

3-BAY

4-BAY





VENTIS DRAWINGS CO-LOCATION

